

PRODUCT SPECIFICATIONS

LIFTY FOX



Colour: **BLUE 5015 / WHITE 9001 / spreader bar 7035**

Product code: **5010065S01**

GTIN code : 3615800005017

Product range:
Mobile hoist

Description:
Electrical mobile hoist, 200 kg = 31.5 stones, folding format, 4 point spreader bar.

Recommended use:
Application environment 3-4-5

Medical device : yes MD classification : I

Warranty:
5 years for electrical equipment and structure
(except battery: 1 year)



Technical features

Dimensions (mm)

Cf. page 2

- Folded dimensions: 1273 x 660 x 400
- Packaging: 1350 x 710 x 430

Tolerances: dimensions 20mm - weight 500 g

Technical description

- Steel construction – bicolour Epoxy finish
- Boom 60x30x3 – mast 50x50x3 – legs 60x40x2
- Manual leg spreader operated by two steel pedals
- 2 Linéa braked castors at rear Ø 100 mm
- 2 Linéa castors at front Ø 75 mm
- Steering handle
- Vertical storage (on wheels)

Electrical system

- Actuator LA40 8700N LINAK (with safety crushing) + electrical and manual emergency going down.
- Control box CBJ Home LINAK, with emergency stop, integrated batteries charger
- Anti pull cable kit
- 2 functions remote control

Product weight:

42 Kg

Date placed on the market: **Nov. 2017**

Last version: **21/06/2023**


Labelling

		Route de Sainte-Alvère 24100 Bergerac - FRANCE			
REF	LIFTY FOX	GTIN		3615800005017	UDI
				2023-07	
SN	P50100652300100001				
				MAX : 200kg	MD

(01)03615800005017(10)(0)FLA-11111111(11)230701(21)P50100652300100001


PRODUCT SPECIFICATIONS

Dimensions LIFTY FOX

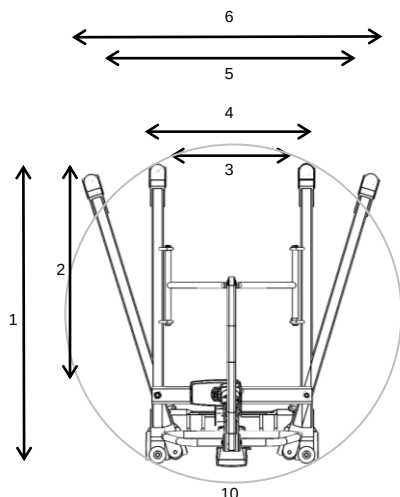

Base dimensions

1 - Maximum external length:	1170 mm
2 - Maximum internal length:	890 mm
3 - Minimum internal width:	560 mm
4 - Minimum external width:	660 mm
5 - Maximum internal width:	1036 mm
6 - Maximum external width:	1156 mm
7 - Height to lower edge of legs:	20 mm
8 - Height to upper edge of front legs:	86 mm
9 - Height to upper edge of rear legs:	170 mm
10 - Turning radius:	1315 mm



General dimensions:

* CSP: Central Suspension Point

1 - Lifting radius at the highest CSP:	700 mm
2 - Lifting range (3-4):	1225 mm
3 - CSP maximum height:	1880 mm
4 - CSP minimum height:	655 mm
5 - CSP height at maximum lifting radius:	1385 mm
6 - CSP minimum height:	500 mm
7 - CSP maximum height:	875 mm
8 - Minimum height at sling hook-up:	435 mm
9 - Maximum height at sling hook-up:	1660 mm
10 - Total height at the lowest position:	1385 mm
11 - Total height at the highest position:	1905 mm
12 - Total length:	1170 mm
13 - Total height from the floor to handle:	990 à 1260 mm

